

MOBILE

SHEARS



**FULL PROTECTION -
LESS MAINTENANCE, MORE UPTIME**



**Patent Pending Dual Max™
Indexable Protection**

The industry's only full-protection, indexable, piercing tip that doubles tip-blade life.




Up to 10% More Force

The new MSD Legend has enhanced jaw geometry resulting in up to 10% more cutting force at the apex compared to prior model.

LEGEND SERIES

FEATURES & BENEFITS

LaBounty shears have proven themselves in scrap metal processing, bridge deconstruction, and industrial demolition for decades.

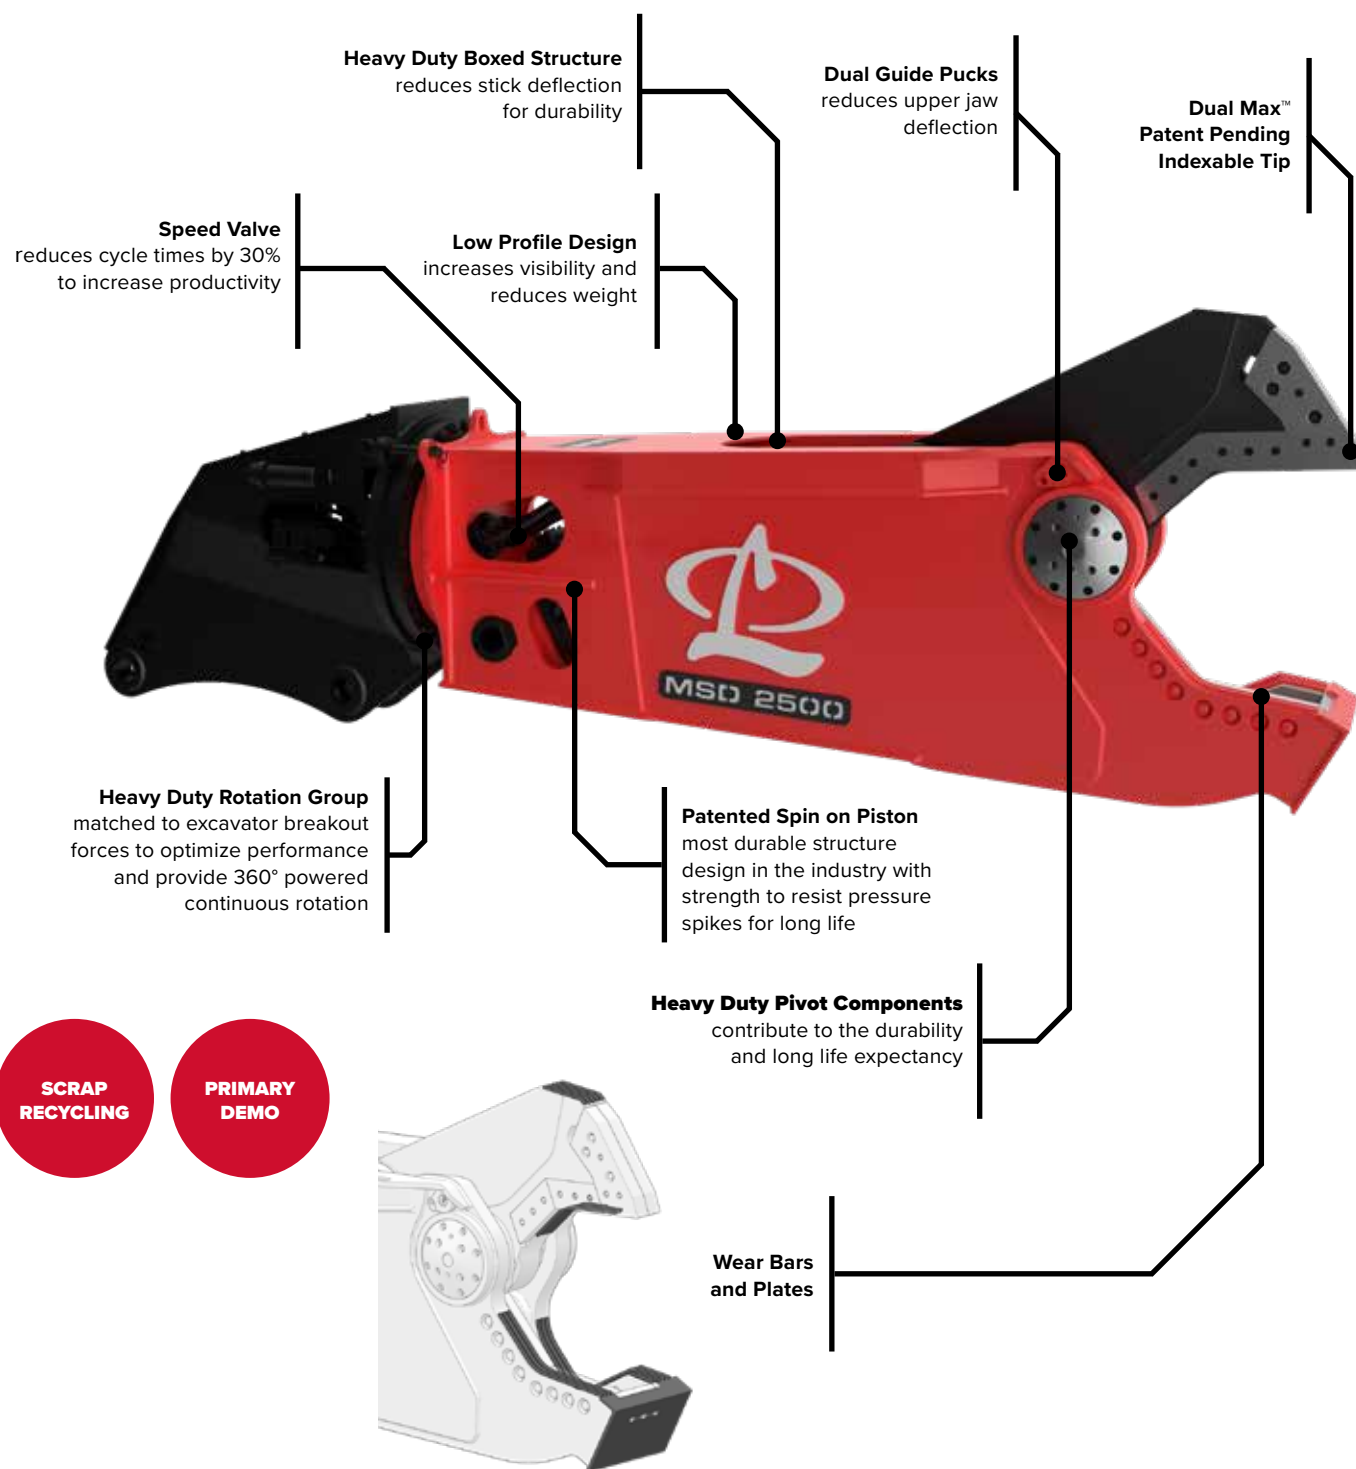

REPLACEMENT BLADE KITS

GET THE HIGHEST QUALITY REPLACEMENT BLADE KITS FOR YOUR LABOUNTY® AND GENESIS® MOBILE SHEARS

Ni LABOUNTY HIGH NICKEL

For maximum blade edge life, and less downtime for maintenance, turn to LaBounty's Ni blades which contain a 4% Nickel content. Our high Nickel primary and secondary blades are available for most models of LaBounty's MSD Legend and Saber Series Shears.



LABOUNTY PREMIUM

LaBounty Premium blades have been designed and time tested in an entire spectrum of applications; resulting in the perfect materials and heat treatments to insure you put more scrap on the ground year after year. Our Premium blades are available for all models of LaBounty's MSD Saber and Legend Series Shears.



MSD, BLS, MWS SERIES SPECIFICATIONS

DEMOLITION

ATTACHMENTS

MSD LEGEND SERIES - MOBILE SHEARS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 1500	7,000	3,200	21	540	25	640	6.8	2.1	26,000	12	42,000	19	55,000	25	70,000	32
MSD 1500R	7,440	3,400	21	540	25	640	10.0	3.1	40,000	18	48,000	22	66,000	30	88,000	40
MSD 2000	9,000	4,100	28	710	29	740	8.0	2.4	42,000	19	44,000	20	70,000	32	99,000	45
MSD 2000R	11,000	5,000	28	710	29	740	10.8	3.3	48,000	22	53,000	24	88,000	40	99,000	45
MSD 2250	10,600	4,800	30	760	30	760	8.6	2.6	44,000	20	51,000	23	88,000	40	110,000	50
MSD 2250R	12,700	5,800	30	760	30	760	11.7	3.6	53,000	24	66,000	30	99,000	45	110,000	50
MSD 2500	11,900	5,400	31	790	33	840	8.7	2.7	51,000	23	66,000	30	88,000	40	154,000	70
MSD 2500R	14,800	6,700	31	790	33	840	12.7	3.9	66,000	30	88,000	40	110,000	50	154,000	70
MSD 3000	14,200	6,400	34	860	37	940	10.0	3.1	66,000	30	77,000	35	143,000	65	176,000	80
MSD 3000R	17,100	7,800	34	860	37	940	13.1	4.0	88,000	40	99,000	45	154,000	70	176,000	80
MSD 4000	17,100	7,800	38	970	43	1090	11.5	3.5	77,000	35	88,000	40	143,000	65	187,000	85
MSD 4000R	19,800	9,000	38	970	43	1090	14.8	4.5	99,000	45	110,000	50	176,000	80	187,000	85
MSD 4500	18,700	8,500	39	990	43	1090	11.0	3.4	88,000	40	132,000	60	165,000	75	CONSULT FACTORY	
MSD 4500R	21,300	9,700	39	990	43	1090	14.3	4.3	110,000	50	165,000	75	187,000	85	CONSULT FACTORY	

InSite available for items highlighted in red

MSD SABER SERIES - MOBILE SHEARS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Max Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***		Max Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons	lbs	mTons	lbs	mTons
MSD 7R	1,200	500	11	280	10	250	6.0	1.8	7,000	3	20,000	9	20,000	9	26,000	12
MSD 800	2,250	1,000	15	380	17	430	5.7	1.7	15,000	7	20,000	9	22,000	10	35,000	16
MSD 800R	2,750	1,200	15	380	17	430	7.2	2.2	20,000	9	22,000	10	26,000	12	40,000	18
MSD 1000	4,200	1,900	19	480	20	510	6.0	1.8	20,000	9	26,000	12	35,000	16	66,000	30
MSD 1000R	4,400	2,000	19	480	20	510	8.5	2.6	22,000	10	40,000	18	40,000	18	66,000	30
MSD 7500	25,500	11,600	43	1090	45	1140	12.0	3.7	132,000	60	176,000	80	CONSULT FACTORY		CONSULT FACTORY	
MSD 7500R	30,000	13,600	43	1090	45	1140	17.5	5.3	165,000	75	264,000	120	CONSULT FACTORY		CONSULT FACTORY	
MSD 9500	37,500	17,000	48	1220	52	1320	15.5	4.7	176,000	80	CONSULT FACTORY		CONSULT FACTORY		CONSULT FACTORY	
MSD 9500R	45,600	20,700	48	1220	52	1320	22.0	6.7	264,000	120	CONSULT FACTORY		CONSULT FACTORY		CONSULT FACTORY	

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

BLS SERIES - BUCKET LINKAGE SHEARS

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3rd Member		Max Excavator Weight - 3rd Member	
	lbs	kg	in	mm	in	mm	lbs	mTons	lbs	mTons
BLS 2000	2,900	1,300	20	510	20	510	44,000	20	66,000	30
BLS 3000	4,800	2,200	22	560	23	580	66,000	30	CONSULT FACTORY	

* Jaw openings vary based on excavator specific geometry.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

With the most expansive portfolio of demolition attachments in North America, you can turn to LaBounty for any demolition project no matter size or budget. We've got you covered.