


## UNCOMPROMISING PERFORMANCE & DURABILITY

The next generation of award winning universal processors feature the industry's best power-to-weight ratio for uncompromising power, control, and versatility. Whatever the job you need to tackle, LaBounty has the tool, with processors ranging from 6,300 to 45,000 pounds.

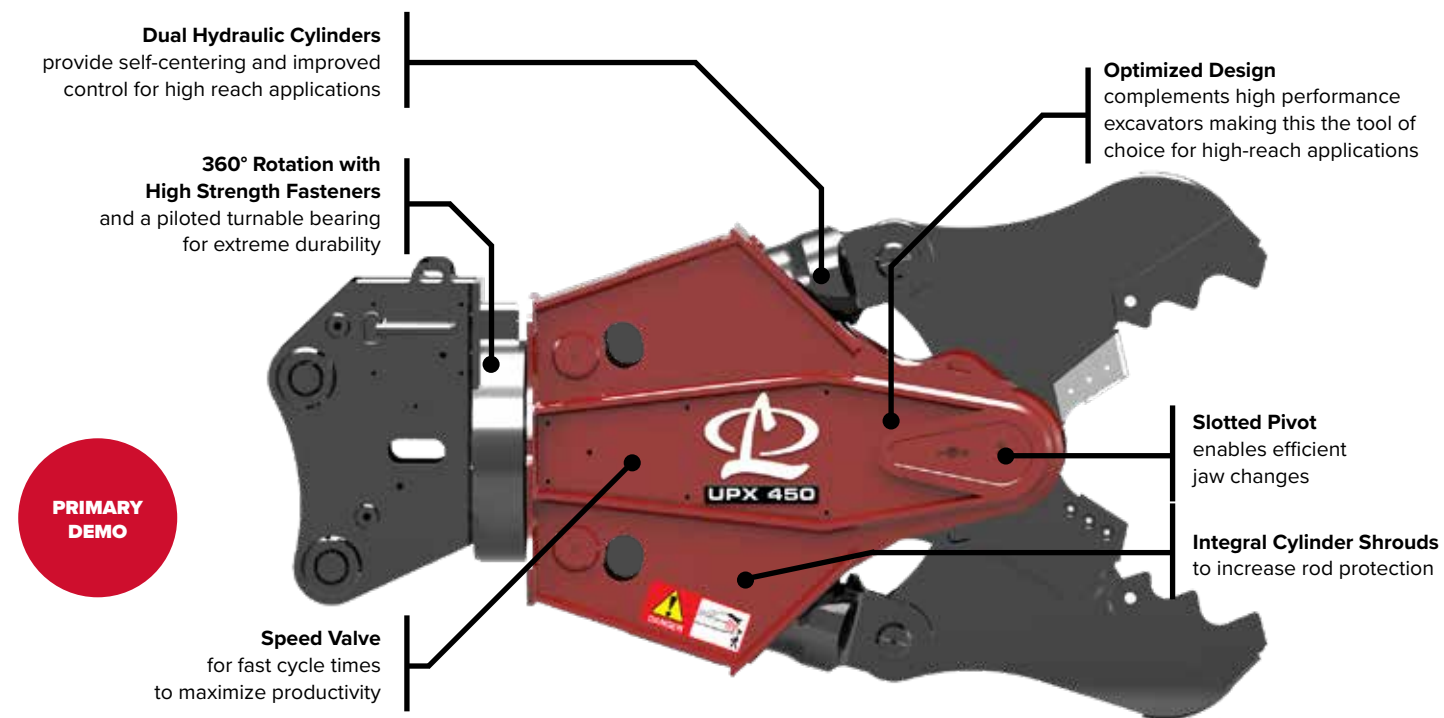

Model	Jaw	Weight (With Jaw)*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight 3 <sup>rd</sup> Member***		Max Excavator Weight - 3 <sup>rd</sup> Member***	
		lbs	kg	in	mm	in	mm	ft	m	lbs	mTons	lbs	mTons
UPX 250	Shear (SH)	6,300	2,900	21	530	19	480	7.8	2.4	55,000	25	99,000	45
	Concrete Pulverizer (CP)	6,800	3,100	29	740	23	580	7.8	2.4	55,000	25	99,000	45
	Concrete Cracking (CC)	6,300	2,900	36	910	25	640	8.3	2.5	55,000	25	99,000	45
UPX 450	Shear (SH)	10,550	4,800	26	660	31	790	10.1	3.1	99,000	45	187,000	85
	Concrete Pulverizer (CP)	10,500	4,800	34	860	24	610	9.8	3.0	99,000	45	187,000	85
	Concrete Cracking (CC)	10,300	4,700	42	1,070	31	790	10.1	3.1	99,000	45	187,000	85
UPX 950	Shear (SH)	19,000	8,600	44	1,120	41	1,040	13.5	4.1	187,000	85	CONSULT FACTORY	
	Concrete Pulverizer (CP)	20,500	9,300	63	1,600	41	1,040	13.3	4.1	187,000	85	CONSULT FACTORY	
	Concrete Cracking (CC)	20,500	9,300	76	1,930	50	1,270	13.4	4.1	187,000	85	CONSULT FACTORY	
UPX 1800	Shear (SH)	33,600	15,300	48	1,220	46	1,170	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
	Concrete Cracking (CC) ****	35,500	16,100	73	1,850	50	1,270	15.5	4.7	CONSULT FACTORY		CONSULT FACTORY	
UPX 2800 (HR)	Shear (SH)	45,000	20,400	51	1,300	52	1,320	19.5	5.9	CONSULT FACTORY		CONSULT FACTORY	

\*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

\*\* Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

\*\*\* Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

## CHOOSING THE RIGHT JAW

### CONCRETE CRACKING JAW - CC



CC JAW

Breaks large, oversized concrete (abutments, beams, etc.). Ideal for primary demolition applications. High grade, abrasion resistant steel used in entire jaw. Improved Swift Lock teeth for quick changeover and reduced downtime. Rebar cutting blades in throat.

NOTE: UPX950 Concrete Cracking jaw does not contain Swift Lock Teeth (weld in replaceable).



UPX 450 WITH CONCRETE CRACKING JAWS

### CONCRETE PULVERIZER JAW - CP



CP JAW

Excellent for crushing concrete and separating out rebar. Improved Swift Lock teeth allow for quick changeover and reduced downtime. High grade, abrasion resistant steel used in entire jaw. Rebar cutting blades in throat.

NOTE: UPX950 Concrete Pulverizer jaw does not contain Swift Lock Teeth (weld in replaceable).



UPX 950 WITH CONCRETE PULVERIZER JAWS

### SHEAR JAW - SH



SH JAW

Cuts rebar and structural steel such as I-beams, H-beams, pipe, etc. Improved pivot components for longer life and patented cutting blade system ensure better performance and reduced maintenance.



UPX 450 WITH SHEAR JAWS