



MOBILE DEMOLITION PROCESSOR

MOBILE DEMOLITION PROCESSOR

MDP SERIES

UTMOST CRUSHING POWER

The LaBounty Mobile Demolition Processor (MDP) is a high powered single cylinder attachment used to crush and process concrete quickly and easily. The MDP is available in a complete range compatible with 18 - 70 ton carriers and is used for primary and secondary concrete demolition and recycling. The MDP design is based on the time-tested and proven LaBounty shear and exemplifies the benchmark quality and performance expected from world renowned LaBounty attachments.

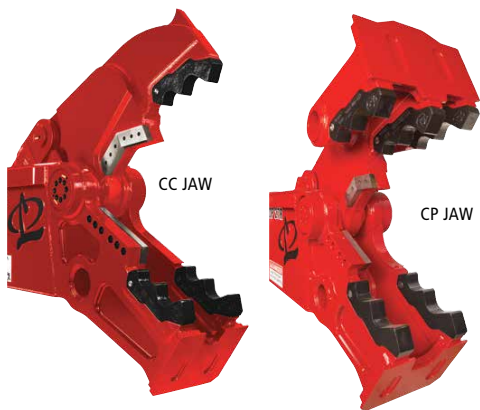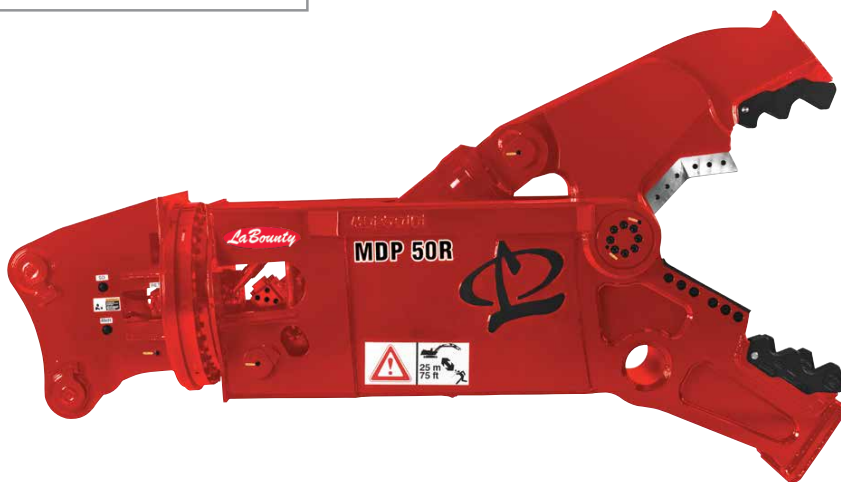

- Unmatched power-to-weight enables ease of processing harder concrete with smaller excavators.
- Apexed jaw blades for material gathering and maximum cutting capabilities.
- Interchangeable concrete cracking (CC) jaw and pulverizing (CP) jaw for versatility.
- 360-degree powered rotation for maneuverability and ease of use.
- Patented "Quick Change Pivot" for quicker jaw change.
- Swift Lock T eeth makes maintenance quick and easy.
- Longer reach and working range for less excavator movement and more time processing.
- Standard speed valve for the MDP 35 and MDP 50 for faster cycle time.

	Excavator Weight 3rd Member	MDP Weight	Jaw Opening	Jaw Depth	Reach
MDP 20R CC	40,000-65,000 LBS / 18-30 TONS	4,600 LBS / 2,085 KG	25 IN / 630 MM	27 IN / 680 MM	9'10" / 3 M
MDP 20R CP	40,000-65,000 LBS / 18-30 TONS	5,250 LBS / 2,380 KG	25 IN / 630 MM	27 IN / 680 MM	9'10" / 3 M
MDP 27R CC	55,000-80,000 LBS / 25-36 TONS	6,300 LBS / 2,850 KG	32 IN / 820 MM	31 IN / 787 MM	9'7" / 2.9 M
MDP 27R CP	55,000-80,000 LBS / 25-36 TONS	6,950 LBS / 3,150 KG	28 IN / 820 MM	30 IN / 787 MM	9'7" / 2.9 M
MDP 35R CC	70,000-110,000 LBS / 32-50 TONS	8,150 LBS / 3,700 KG	39 IN / 980 MM	36 IN / 920 MM	11'2" / 3.4 M
MDP 35R CP	70,000-110,000 LBS / 32-50 TONS	9,000 LBS / 4,100 KG	34 IN / 980 MM	36 IN / 920 MM	11'2" / 3.4 M
MDP 50R CC	100,000-140,000 LBS / 45-65 TONS	12,300 LBS / 5,575 KG	50 IN / 1,260 MM	45 IN / 1,150 MM	13'2" / 4 M
MDP 50R CP	100,000-140,000 LBS / 45-65 TONS	13,800 LBS / 6,250 KG	50 IN / 1,260 MM	45 IN / 1,150 MM	13'2" / 4 M